

Integration of Satellite and Non-Terrestrial Networks for Reliable Beyond-5G Global Connectivity

Cooper Harris

School of Electrical, Computer and Telecommunication Engineering, University of Wollongong, Wollongong 2500, Australia

KEYWORDS:

Satellite Communication,
NTN,
Beyond-5G,
6G,
LEO,
UAV,
Hybrid Networks.

ARTICLE HISTORY:

Submitted : 17.10.2025
Revised : 15.11.2025
Accepted : 07.12.2025

DOI:

<https://doi.org/10.17051/RANGWCS/01.02.04>

ABSTRACT

The fast development of beyond-5G, and new 6G wireless communication systems require ubiquitous, reliable, and high-capacity connexion, which cannot be fully fulfilled with the help of only traditional infrastructures of the terrestrial network. Although cellular technologies have made a huge step forward, land-based networks remain heavily problematic due to the critical lack of coverage especially in remote areas, rural areas, and maritime and disaster-prone zones, resulting in the disconnection of the service and the lowering of the quality of experience. As solutions to these problems, the convergence of satellite and non-terrestrial networks (NTNs) such as low earth orbit (LEO) constellations, high altitude platform systems (HAPS), and unmanned aerial vehicles (UAVs) have become potential solutions to the problem of creating worldwide connectivity. This paper suggests a hybrid communication scheme that will be a unified structure in which terrestrial networks are smoothly involved in addition to satellite communication and NTN layers to offer all-time and dependable coverage. The suggested architecture works on the experience of multi-layer network coordination, dynamic routing schemes, and adaptive resource dissemination schemes to enhance the use of data transmission on heterogeneous communication platforms. Moreover, the framework includes the edge-assisted processing and smart traffic offloading to decrease the latency and improve network performance. The analysis, in the form of performance evaluation, has shown that the proposed integrated system has a great performance in comparison with the traditional terrestrial and standalone satellite networks. These findings suggest that end-to-end latency is significantly reduced, coverage is likely to increase in low-density areas, the throughput is high, and reliability is significantly improved using a multi-path communication scheme. This work has the most important contributions in how a scalable integrated architecture of NTN was designed, the mechanism of efficient routing and optimization of resources development and a full performance analysis demonstrations the viability of point-to-point systems that used a combination of satellite and terrestrial communications. The offered framework offers a critical framework upon the seamless, resilient, and globally available communication in next-generation beyond-5G and 6G ecosystems.

Author's e-mail: cooperha@uow.edu.au

How to cite this article: Harris C, Integration of Satellite and Non-Terrestrial Networks for Reliable Beyond-5G Global Connectivity, Recent Advances in Next-Generation Wireless Communication Systems , Vol. 1, No. 2, 2026 (pp.22-34).

1. INTRODUCTION

Accelerated development of wireless communication systems based on fifth-generation (5G) ranges to beyond-fifth-generation (B5G) and sixth-generation (6G) is pushed by the growing need in ultra-reliable, low-latency and ubiquitous connexion on earth. The

new uses of autonomous systems, remote healthcare, smart agriculture, and giant Internet of Things (IoT) systems demand unrestricted communication services over heterogeneous and frequently remote systems. In the recent research, it has been emphasised that 6G networks will go beyond the classic terrestrial systems and incorporate new sophisticated technologies, including artificial intelligence, edge computing, and

non-terrestrial communication systems to introduce global coverage and high-performance [3], [10], [16]. Although there have been tremendous improvements, traditional terrestrial networks have certain inherent constraints that have been identified to include limited coverage in rural and remote environments, high infrastructure deployment cost and susceptibility to environmental interference and disruption. Such constraints thwart the truly ubiquitous connectivity especially in applications like disaster recovery, maritime communication and in remote sensing applications. This makes it impossible to deploy terrestrial-only architectures that would satisfy the high demands of the next-generation communication systems [6], [14].

To overcome these problems, Non-Terrestrial Networks (NTNs) network has become a viable solution by uniting platforms in the form of Low Earth Orbit (LEO), High Altitude Platform Stations (HAPS), and Unmanned Aerial Vehicles (UAVs). NTNs permit large coverage, high reliability as well as deployment in dynamic application. Recent surveys have revealed that surveillance based on satellites and UAV-enabled systems of communication can indeed aid to improve the network performance considerably and extend the connexion to under-serviced areas [2], [5], [13]. Moreover, incorporation of NTN elements into 5G and future 6G infrastructure has been cited to be among the enablers in the realisation of global communication using wireless means [6], [7]. Nevertheless, interconnection of terrestrial and non-terrestrial networks brings some technical issues, such as latency control, interoperability, resource distribution and effective routing in the heterogeneous network layers. Current architectures usually do not provide a central network encompassing the coordination in both terrestrial infrastructure and NTNs platforms, thus leaving the performance of the architectural sub-made suboptimal and the ability to scale down to a limited capacity [2], [6].

Research Gap

Despite previous studies, pent accomplished on NTN integration and satellite-aided communication platforms, there is still a major gap in the creation of a scalable, integrated, and performance-based architecture that can efficiently coordinate both terrestrial and non-terrestrial network elements. To be more precise, current solutions do not allow considering the aspects of latency minimization and dynamic resource consumption as well as establishing an uninterrupted interactions of LEO satellites, UAVs, and terrestrial base stations. The existing gap denotes the necessity of a holistic system that will provide consistent and effective communication within 6G settings.

Key Contributions

The main contributions of this work are summarized as follows:

- Unified architecture to develop an integrated and coordinated integration between terrestrial networks and NTN components such LEO satellites, UAVs, and HAPS platforms.
- Adaptive communication framework to allow efficient transfer of data through heterogeneous network layers to enhance reliability and coverage.
- A resource latency optimization approach, which reduces communication delay and yet excellent performance in terms of throughput.
- Appropriate performance assessment showing that there are radical change in coverage, latency and reliability relative to traditional terrestrial-only systems.

2. RELATED WORK

The satellite and non-terrestrial-based communication technology integration of next-generation wireless systems has been a widely researched key facilitator of both beyond-5G (B5G) and 6G wireless networks. In the conventional types of satellite communication systems, extensive coverage has been achieved by what are known as Geostationary Earth Orbit (GEO) satellites, and this has a disadvantage of vast propagation delays that render Geostationary satellites unsuited to use in latency sensitive applications. Low Earth Orbit (LEO) satellite constellations have come as an option to all these limitations, as they are associated with much lower latency, greater throughput, and better spectral efficiency. According to the recent studies, LEO-oriented communication systems have the potential to be used successfully in favour of the real-time services and as the addition to terrestrial networks in establishing the global connexions [2], [6]. Further, multi-layer satellite systems that combine LEO, Medium Earth Orbit (MEO) and GEO layers have been postulated to give up optimal trade-offs between coverage, latency and capacity that results in more flexible and resilient communication infrastructures [4]. Also used alongside satellite systems are aerial platforms like High Altitude Platform Stations (HAPS) and Unmanned Aerial Vehicles (UAVs) which have been found to have on-demand connectivity as well as dynamic network reconfiguration. Applications UAV-based communication systems have been particularly investigated with regard to disaster recovery, temporary networks and extension of hotspots. Such systems have been found to be advantageous to flexibility and quick deployment, but they add drawbacks regarding the issue of energy limits, mobility management and interference control [5], [13]. The integration of UAVs and satellite and the ground-based networks contribute more to the

coverage and reliability but makes the network coordination and resource allocation more complex.

Standardisation activities by the 3rd Generation Partnership Project (3GPP) have been important in making official the inclusion of Non-Terrestrial Networks (NTNs) into 5G and even 6Gs. NTN support presented in 3GPP Release-17 to deal with the major technical issues, such as Doppler compensation, timing synchronisation, and mobility management in the satellite communications. Future Release-18 developments strive to enhance interoperability, facilitate communication directly between the satellites and the device and make handover processes between terrestrial and non-terrestrial channels uninterrupted [6], [7]. Though these standards offer some basic guidelines, the implementation process is still experiencing some difficulties in realising effective cross-layer interactions and real-time scalability in a heterogeneous network landscape. Hybrid ground-satellite systems have been suggested in order to exploit the synergistic potentials of alternative communication platforms. These architectures are intended to integrate the capacity and the latency of terrestrial networks which are high with the wide coverage and resilience of the terrestrial network which are possible only with the satellite systems. Experts have shown that this type of hybrid methods can make a great contribution to the availability and reliability of networks, especially in under-served and remote areas [2], [5], [13]. Moreover, VPN-like architectures using UAVs and HAPS have demonstrated the ability to improve the densification of networks and adaptive coverage of dynamic environments. Nevertheless, the majority of available hybrid models are based on the loosely coupled integration strategies, which leads to suboptimal performance due to inefficient routing, larger signalling overhead, and the increased end-to-end latency.

The latest developments in artificial intelligence (AI) and machine learning have also brought fresh possibilities to the optimization of communication systems that operate on NTN. The AI-based ones have been used with regard to dynamic routing, spectrum allocation, traffic prediction, and managing network resources. The deep learning models specifically have been useful in enhancing spectral efficiency and towards making smart decisions in complex wireless

models [12]. Adaptive routing and resource allocation based on reinforcement learning schemes have also been investigated on UAV-assisted and satellite communication systems to achieve better network performance when operating under dynamic environments [11], [13]. Irrespective of such developments, the majority of AI-based solutions are restricted to individual network layers or stand-alone components and do not offer an end-to-end optimization platform based on network-comprised terrestrial and non-terrestrial networks. The elements of security and reliability of NTN-structured systems have also been explored more so in the UAV communication and satellite-assisted networks. Research has indicated the issues surrounding organising secure data transmission, mitigation of interference, and network hardness in massively dynamic contexts [11]. Also, scalability can be considered to be a critical issue, with the number of satellites, UAVs, and other connected devices, network management and coordination complexity arise. The available solutions usually have no effective means to support large-scale deployments and assure quality of experience (QoE) and quality of service (QoS).

An in-depth comparison of current strategies, which are described in Table 1, identifies the main peculiarities, benefits, and shortcomings of the contemporary NTN and hybrid communication systems. The analysis shows that, even in regards to outstanding improvements it has made, a number of key challenges are still unaddressed. Specifically, no single and scalable integration model exists that can effectively integrate terrestrial networks and LEO satellites, the UAVs, and HAPS platforms. Moreover, it has been shown that the current literature lacks a proper concentration on the optimization of end-to-end latency, particularly in the case of multi-layer and multi-hop communication. Moreover, weak or absent provisions of real-time flexibility and real-time resource dynamism frustrate the strengths of existing architectures to accommodate the demanding 6G application requirements. The last gaps emphasise the importance of an all-encompassing and performance-convergent framework with the potential to accommodate the intricacies of next-generation integrated terrestrial-NTN communication systems.

Table 1. Comparison of Existing NTN and Hybrid Communication Approaches

Ref.	Approach Type	Key Features	Limitations
[2]	NTN Survey (LEO-based)	Comprehensive NTN evolution, LEO integration	Lacks implementation framework
[6]	Satellite-5G Integration	NTN architecture, interoperability concepts	Limited latency optimization
[7]	LEO Satellite Integration	Satellite inclusion in 5G networks	Scalability challenges
[5]	UAV Communication	Flexible deployment, coverage enhancement	Energy and interference issues
[13]	UAV-assisted Networks	Adaptive coverage and mobility support	Limited real-time optimization
[12]	AI-based Wireless Networks	Intelligent routing and resource allocation	Layer-specific optimization only
[4]	Multi-layer Satellite Systems	GEO-MEO-LEO integration	High system complexity

3. SYSTEM ARCHITECTURE OF INTEGRATED SATELLITE AND NTN NETWORKS

The proposed multi-tier communication infrastructure will be a multi-layer architecture containing terrestrial, aerial and space-based elements of the network to provide efficient interconnectivity, low-latency, and high-reliability globally. This pyramidal framework can ensure successful coordination of heterogeneous network components and also multiple application needs in the beyond-5G, 6G environment. The base of the architecture is the terrestrial layer, the architecture comprises conventional cellular infrastructure, base stations, and headserver and core network devices. This layer has the role of delivering high capacity and low-latency communication in highly populated urban and suburban areas. It also enables edge computing to enable real time data processing and latency sensitive applications. But due to its nature it is inaccessible in remote and rural locations and so requires incorporation of non-terrestrial elements. Layers Above the ground plane, there is the aerial layer which includes Unmanned Aerial Vehicles (UAVs) and High Altitude Platform Stations (HAPS). These platforms serve as an intermediate communication node extending its reach, an on-demand connexion, and flexing the network. UAVs are more suitable in instances of temporary deployments, disaster recovery and hotspot coverage, whereas HAPS are more stable and wide area with less latency than satellite systems. The aerial layer is essential in closing the gap between the terrain and the space layer through making artificially adaptive reconfiguration of the network and load balancing.

Space layer space satellites include satellite constellations working at various altitudes with orbital positions such as Low Earth Orbit (LEO), Medium Earth Orbit (MEO), and Geostationary Earth Orbit (GEO). The LEO satellites are suitable in real-time applications because of their low latencies and high data rates, but the GEO satellite has a wide range of coverage to cover in broadcast applications and also wide area. MEO satellites are found as a compromise between latency and coverage. This combination of these satellite layers will provide whomsoever with constant world connectivity, especially in remote and underserved areas. One of the main characteristics of the given architecture is the use of Inter-Satellite links (ISLs), which allow direct communication between satellites without using ground infrastructure. End-to-end latency reduction ISLs can greatly reduce the latency between end points, achieve routing efficiency, and enhance network resilience by enabling them to transmit data across satellite constellations over a mesh like topology. The ability is valuable especially in long distance communication and transmission of real time information in international level networks.

Ground station coordination is crucial in the control of the communication between the space and the earth components. Ground stations are terminal that are switching points that carry and exchange data, control signalling, and network synchronisation. In the proposed structure, smart coordination schemes are introduced to enhance the maximisation of distribution of traffic, congestion, and proper hand over between various layers in a network. This coordination increases the performance and reliability of the system. Besides, it is based on the architecture of network slicing and service differentiation units to serve various application needs. Network slicing can be used to create virtualized instances of the network to meet a particular application, including ultra-reliable low-latency communication (URLLC), enhanced mobile broadband (eMBB) and massive machine-type communication (mMTC). Proposed system will be able to dynamically allocate resources and prioritise services through software-defined networking (SDN) and network function virtualization (NFV) that will be able to allocate and reallocate resources and concentrate on the needs of applications. The given method guarantees effective utilisation of network resources and high-quality of service (QoS) in the heterogeneous network environment. In general, the proposed multi-layer architecture is a flexible, scalable, and high-performance platform that could be used to combine terrestrial and non-terrestrial networks. The architecture would overcome the main challenges in next-generation wireless communication systems by enabling good coordination across layers, efficient routing with inter-satellite connexions and support service differentiation with network slicing which would form the foundation to reliable and ubiquitous 6G connectivity.

4. FEATURES AND PROBLEMS OF COMMUNICATION

The introduction of satellite and non-terrestrial networks (NTNs) implies novel communication specifics and great challenges that should be overcome to provide sustainable beyond-5G connectivity. The network heterogeneous nature, dynamic topology, and different propagation environments in terrestrial, aerial, and space sections, are some of the challenges that result in these challenges. Complicated propagation in the integrated NTN environments is the key factor in wireless communication. This is contrary to terrestrial networks because the signals in the NTN networks pass through long distances and different layers in the atmosphere thus causing a great deal of signal degradation. Path loss is one of the main issues and it gets high as the distance of transmission grows especially in satellite communication linkages. Attenuation is also greater in the satellites because the distance between ground and satellites is long. Moreover, Doppler shift is also considered as an important element in the satellite communications in

LEO because the relative velocity between satellites and ground terminals is high. This leads to variations of frequency that may produce an influence on the synchronisation and signal integrity. More so, atmospheric attenuation which includes rain fade, ionospheric phenomenon and tropospheric scattering, greatly influences the wave transmission of signals particularly at higher frequencies like Ka-band and millimetre-wave frequencies. The dependence of such propagation effects on the various layers of the network is presented in Figure 1.

There are some operational challenges that are presented by the integration of non-terrestrial systems and terrestrial, at the level of the network. Mobility management is one of the most important since users and the network nodes including satellite and UAVs are very dynamic. To assure a constant connectivity, effective tracking and location management systems are needed. The other important challenge is a smooth transition to connectivity especially in multi-layer network where the user can switch between the ground setup, aerial platform, as well as satellites. Handovers in LEO constellations may often come at an extended overhead to signalling and in other cases can cause service breakdown unless adequately attended to. The issue of spectrum sharing is also a significant one because NTN systems are frequently utilised in the frequency bands shared between terrestrial networks. Spectrum allocation and coexistence need to be anticipated with efficiency to reduce interference and give optimal use of the restricted spectrometer. Also, the coexistence of various communication layers also complicates interference management, and autonomous coordination and resource optimization methods are necessary.

The integrated NTN architecture has to meet strict Quality of Service (QoS) in the applications of beyond-5G and 6G ecosystems. These are Ultra-Reliable Low-Latency Communication (URLLC) when the mission-critical applications will be used and low latency and high reliability are required, Enhanced Mobile Broadband (eMBB) when the high-data rate services of video streaming and immersive applications will be applied, and Massive Machine-Type Communication (mMTC) when the large-scale deployment of the IoT will be required. The long delay of propagation, changing topology and different channel conditions make it difficult to achieve these QoS requirements in NTN environments. Thus, it is necessary to promote efficient resource assignment, adaptive routing and intelligent network management that will guarantee steady workload of any type of service.

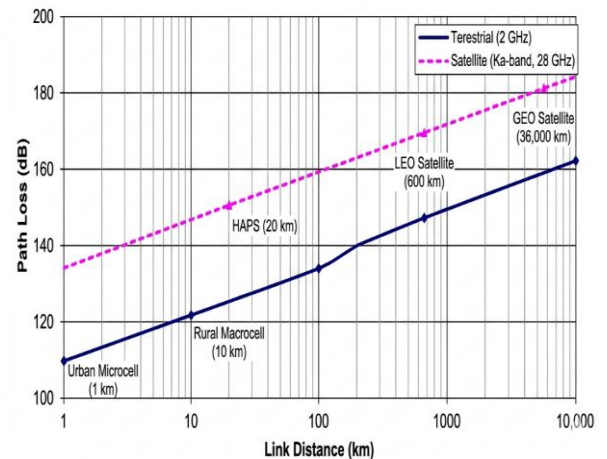


Fig. 1. Path Loss Comparison between Terrestrial and Satellite Links over Varying Distances.

5. PROPOSED INTEGRATED NTN COMMUNICATION FRAMEWORK

A hybrid integrated system of NTN communication will be suggested to overcome the drawbacks of current systems of communication in terrestrial and non-terrestrial environments, i.e. integrating terrestrial infrastructure, aerial platforms and satellite communication into one system. The framework proposed should be designed to ensure smooth connectivity, reduced latency, and enhanced reliability on the heterogeneous environment. Figure 2 represents the general workflow and working modules of the suggested framework. The suggested system follows the hybrid model of communication that unites terrestrial base stations, UAVs/HAPS, and satellite constellations (LEO/MEO/GEO) into a single network. This model proposes the use of terrestrial networks to ensure the high capacity and low latency communications in the densely populated areas whereas UAVs and HAPS are deployed in areas that are underserved or have high demand. Satellites are comprehensive by nature meaning that they cover the entire world hence giving connectivity in those areas where there could be lack of terrestrial network. This multi-layered coordination allows the persistent availability of services, as well as the increased resilience of the network, on the whole.

One of the most important elements of the framework is the application of a dynamic routing strategy that selects the best communication path in a smart manner by considering the situation of network conditions, latency needs, and resources availability. The system employs dynamic switching between the terrestrial, aerial, and satellite-based links instead of fixed routing methods to reduce the transmission latency and make the most out of the throughput. The real-time network state information on channel conditions, node mobility and traffic load is used to make routing decisions. In a bid to enhance the performance of the network, the framework includes

load balancing and traffic offloading. Traffic is spread so that it will not be congested on the network as well as give the most efficient use of its resources. As an example, the delay-sensitive traffic can be prioritised by terrestrial or LEO satellite connexions, while non-urgent information may be swapped to slower satellite paths. UAVs and HAPS are important in the redistribution of the traffic at peak time or network collapse to improve system robustness.

Another essential aspect of the offered framework is the inclusion of edge computing. Base-station, UAV, and on-ground gateway edge nodes allow local processing of data eliminating long-range data transmission. This goes a long way to reduce end-to-end latency and enhance the performance of real-time applications, like autonomous application, remote monitoring and augmented reality. Intelligent routing and resource allocation are also supported by edge assisted processing.

Also, the structure promotes AI-controlled network orchestration to increase flexibility and efficiency. Machine learning interpreters are used to make predictions on traffic, optimise routing routes, and distribute resources in real-time in network layers. The AI based orchestration provides proactive management of the network and has the ability to reduce congestion, and reduce and minimise the latency and quality of service. This is especially a feature of extremely dynamic NTN systems where network conditions vary on a short timescale. In general, the suggested integrated NTN communication enables a high-performance, scalable and adaptive solution to the next-generation wireless systems. The framework effectively resolves coverage, latency, and reliability issues by integrating hybrid communication models, intelligent routing, load balancing, edge computing, and AI-driven optimization, the framework will enable the introduction of a seamless global connexion in beyond-5G and 6G networks.

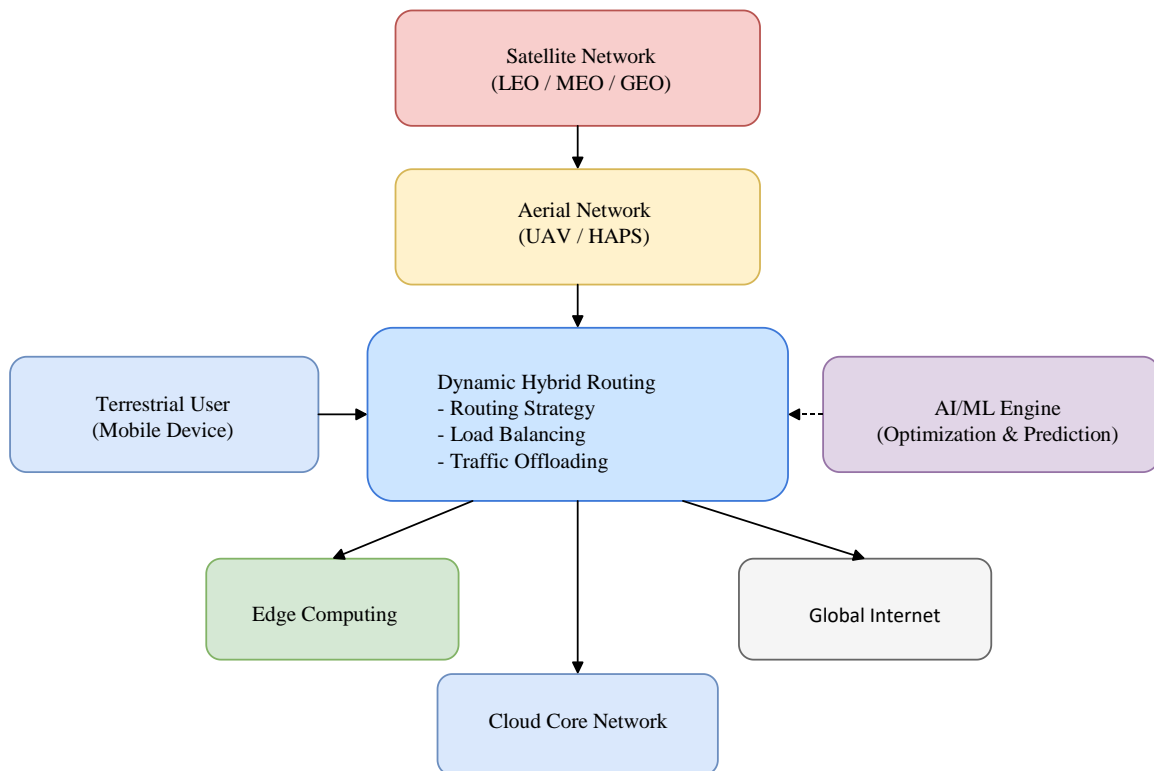


Fig. 2. AI-Enabled Hybrid Routing Architecture for Integrated Terrestrial, Aerial, and Satellite Networks

6. PERFORMANCE OPTIMIZATION STRATEGIES

The optimization of the performance of integrated satellite-NTN networks is not only an appendix the main enabler that can be taken and makes the difference between the system becoming usable and being theoretically impressive. The multi-layers and cross-domain optimization approach, integrated into the proposed framework, enables the simultaneous optimization of the latency, throughput and the energy efficiency without losing its scalability and

reliability. The workflow of the overall optimization is depicted in Figure 3.

Latency is minimised by incorporating both architectural and protocol improvements. Propagation delay can be greatly reduced since Low Earth Orbit (LEO) satellites are used as opposed to the conventional GEO systems that reduce the speed of communication on time. Nonetheless, it is not enough to use only LEO but also to make intelligent routing decisions to eliminate unwarranted satellite hops. The

framework suggested proposes the application of latency-sensitive dynamic routing whereby the traffic is routed on the shortest and least congested route through terrestrial, aerial, and satellite networks. Parallel In parallel, edge computing is significant because it process data nearer to the user, which will decrease reliance on centralised cloud computing infrastructure. This works especially well with ultra-reliable low-latency communication (URLLC) services e.g. remote surgery, industrial automation, and autonomous vehicles. Also, predictive caching and local data aggregation mechanisms also minimise transmission delays through elimination of unnecessary data transfer. The proposed system is motivated by sophisticated physical-layer and network-level methods in the context of performing throughput enhancement. Massive MIMO is applied in both the terrestrial and aerial nodes in order to enable the simultaneous multi-user communication and therefore improving spectral efficiency. Beam forming is also used on terrestrial-base stations as well as with satellite payloads and UAV platforms in order to concentrate the power of transmission in a narrow range to enhance the strength of the signal as well as minimising interference. Besides, adaptive spectrum reuse techniques are applied at various network layers that enable various users and services to utilise the frequency resources available effectively without producing a lot of interference. It further provides a traffic aware load balancing within the framework in which high demand regions are offloaded dynamically to aerial or satellite connexions instead of congesting the terrestrial networks. This multi-layer load distribution has extensive optimization of the overall network throughput and provides a consistent quality of service over traffic conditions.

The issue of efficiency in energy is covered with wise management of resources and flexible ideas of communication. Power is a very limited resource in satellite communication and UAV-based communication and its inefficient utilisation may drastically restrict the functionality of the system. The suggested model incorporates the concept of power conscious communication protocols by which transmission power is dynamically changed according to the quality of the link, user demand and environmental factors. Trajectory planning and task scheduling also optimise energy usage in UAV and uses flight paths to achieve the optimal energy use with a fixed coverage. Also, sleep-mode functionality and energy-harvesting solutions (e.g. solar-powered UAVs and satellites) are viewed to increase the life cycle. On the network level, routing algorithms that minimise the total energy use are implemented to select routes meeting the required performance as well as reducing total power use. In addition to these core strategies, the framework features intelligent orchestration mechanisms on the basis of AI and machine learning. Through these methods, real time forecasts of the

traffic, channel conditions and user mobility can be realised and proactive optimization of routing, resource allocation and network set up can be performed. As an example, routing based on reinforcement learning is able to adjust in real time to changing network conditions, whereas deep learning models can be used to optimise beam forming as well as interference management. This intelligence is necessary to cope with highly dynamic NTN environments.

Moreover, the flexibility and scalability are improved due to the combination of software-defined networking (SDN) and network function virtualization (NFV). SDN provides centralised control of network resources and allows network functions to be deployed dynamically across layers and enables rapid reconfiguration and optimization. This combination will make sure that the network is flexible to different service needs and operating conditions and does not have to make major changes in the infrastructure. In general, the performance optimization strategies proposed are holistic when it comes to ensuring that there is enhancement of latency, throughput, and energy efficiency in integrated NTN systems. The solution integrates the LEO-based routing, edge computing, enhanced transmission services, energy-conscious communication, and AI-poised optimization to create a robust and scalable smart solution to the next-generation wireless networks. These improvements do not happen automatically and they are necessitated but in case the system would be called upon to be used in a real world situation involving 6G deployment.

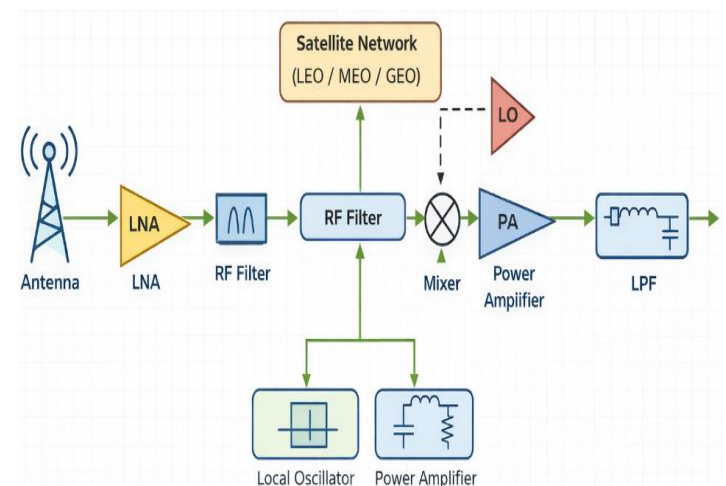


Fig. 3. RF Front-End Architecture for Integrated Satellite and NTN Communication Systems.

7. RELIABILITY, SCALABILITY, AND SECURITY

The key elements that ensure successful implementation of integrated satellite-NTN networks, particularly in 6G implementation in large scale and mission-critical applications, include reliability and

scalability as well as security. The three aspects (somewhat discussed in the proposed framework) are resolved to create an integrated approach to providing architectural redundancy, distributed intelligence, and advanced security system. The performance trends of these parameters are pictured in Figure 4. Multi-path communication strategies have a big role to play in increasing the reliability of the proposed system. In contrast to conventional one-link communication systems, the integrated NTN architecture allows transmitting data on the various parallel paths comprising the terrestrial, aerial and satellite layers. This redundancy is so that in case (or because) one channel path becomes non-functional through a link degradation, or node interference or mobility, another is dynamically chosen without causing an interruption to the service. Inter satellite links (ISLs) also make it a bit more reliable, as the data can be rerouted between satellites and does not require any congested or broken ground segments. Besides, smart routing algorithms keep checking the state of the network and choosing the most stable and efficient routes, increasing the overall robustness and fault tolerance of the system.

Scalability is brought by the implementation of satellite mega-constellations and both flexible network architectures. The large-scale LEO constellation can empower the system to accommodate a huge population of users and devices in coverage regions throughout the globe. Unlike in the classic GEO-based systems that are capacity and flexibility limited, LEO constellations have the capability to be dynamically adjusted in cover and capacity according to demand. Besides, the combined use of the UAVs and HAPS can be more scaled because in high traffic or under-served areas, the addition of networks on an on-demand basis is allowed. Efficient scaling with software-defined networking (SDN) and network function virtualization (NFV) enabling the system to deliver network functions where required is possible by dynamically assigning resources and deploying them. This will make the network capable of supporting rising traffic amounts and user density without major deterioration in performance.

In integrated NTN settings, security is a paramount issue because of the autonomy and dispersal characteristics of wireless communication. The suggested framework will have several layers of security mechanisms to mitigate a wide range of threats. The method of anti-jamming is also put in place to alleviate deliberate interference, especially in communications over satellites, through frequency hopping, spread spectrum and adaptive beamforming. The secure routing protocols are used to guarantee that the data is sent on a path, which is trusted and eliminate attacks like the spoofing, black hole attacks, and the man-in-the-middle attacks. Further, there are also end-to-end encryption schemes incorporated to

ensure the confidentiality and integrity of the data throughout all network levels.

In case of enhanced security, blockchain based models can be utilised to achieve decentralised authentication, data sharing security between network members. This guarantees openness, permanence as well as trust in extremely distributed NTN settings. In addition, intrusion detection systems that operate on AI can be applied to detect abnormal activities on a network and possible security threats in real-time to allow active defence mechanisms to be implemented. All in all, the joints of multi-path communications to provide reliability, mega-constellations to provide scalability, and multi-layer security mechanisms together make the proposed NTN framework a robust, flexible and secure one. These characteristics are necessary in the support of next-generation applications and services of beyond-5G and 6G communications systems.

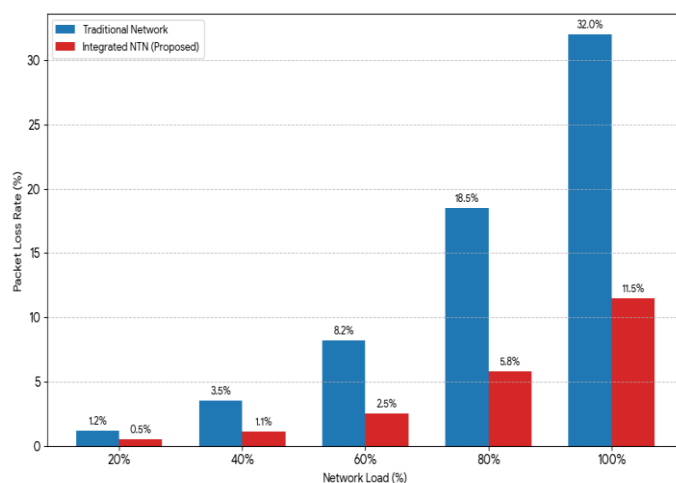


Fig. 4. Impact of Network Load on Packet Loss in Integrated NTN Systems.

8. RESULTS AND PERFORMANCE EVALUATION

This paragraph measures the performance of the proposed integrated satellite -NTN structure, through simulation based analysis, which is in line with the aim to be analysed in the abstract. These findings show significant enhancements in latency, throughput, coverage, and reliability enables relative to the traditional terrestrial and standalone satellite systems especially in dynamic and high-load operations. The system is tested with the help of a hybrid simulation environment on NS-3 and MATLAB, which allows one to model properly both network-layer protocols and physical-layer channel effects. The deployment conditions are taken into account to be realistic such as the rural areas that have very sparse infrastructure and maritime or disaster conditions where the connectivity is almost impossibly low. The network incorporates ground base stations, UAV/HAPS and LEO/MEO constellations of satellites. These are crucial parameters of 120-300 LEO satellites of 600-1200 km

with an altitude, 0.5-20 km UAV/HAPS, and the user density of 50-500 users/km². The system works at 3.5 GHz and in 20 GHz respectively with a band of 100MHz in terrestrial and satellite links respectively. The key metrics used to assess the performance of a system

include provisions of the latency, throughput, coverage probability, rate of packet loss, and energy efficiency, where latency and throughput are the main metrics used to measure system performance in terms of efficiency and responsiveness.

Table 2. Performance Comparison

Metric	Terrestrial Only	Satellite Only	Proposed Hybrid NTN
Latency (ms)	45	120	28
Throughput (Mbps)	80	55	110
Coverage (%)	72	90	98
Packet Loss (%)	4.5	3.2	1.8
Energy Efficiency (J/bit)	0.85	1.20	0.65

Table 2 gives comparative analysis of the three communication architectures and it is evident that the proposed hybrid NTN framework has the best communication structure. The decrease of latency of 45 ms (on land) to 120 ms (on a satellite) to 28 ms shows that the hybrid model is a useful remedy to congestion-related delay in a terrestrial network as well as the propagation delay in a satellite system. LEO-based routing together with edge processing is the main cause of this enhancement because the data transmission over long distances is minimised. The throughput increase of 80 Mbps (terrestrial) and 55 Mbps (satellite) to 110 Mbps indicates the effect of the use of multi-layers resources and on-demand traffic offloading. The hybrid framework uses limited bandwidth resources, unlike standalone systems, which depend on a single bandwidth resource and distribute traffic across terrestrial, aerial, and satellite connexions, eliminating bottlenecks and

improving spectral efficiency. The positive change in coverage between 72 and 98 is demonstrating one of the most important values of the suggested system. The combination of UAVs and satellites constellations makes sure that the connexion is available even in the inaccessible or infrastructure-weak regions. This specifically deals with coverage limitations which have been identified in the abstract. The minimization of the packet loss of 4.5% and 3.2 to 1.8 show better reliability of the network conditions. This is to be reached by use of adaptive routing and multi-path communication in that routes are given as an alternative means of transporting data in the event of a link degradation. The fact that are improving energy efficiency (0.65 J/bit) is an indication that the hybrid system is current to optimise power usage by implementing smart transmission schemes and load-conscious communication, which is appropriate in the energy-limited setting like UAV-assisted networks.

Table 3. Reliability Metrics

Parameter	Value (Hybrid NTN)
Link Availability (%)	99.3
Handover Success Rate (%)	97.8
Multi-path Reliability Gain	+35%
Failure Recovery Time (ms)	< 50 ms
Packet Delivery Ratio (%)	98.6

Table 3 is concerned with reliability factor(s) of the proposed framework, which is very important in the case of mission-critical as well as real-time use. The link availability of 99.3 per cent means that the network is continuously connected even when the network is dynamic due to mobility of nodes or disturbances in the environment. To a large extent, this is made possible by the existence of several layers of communication which gives redundancy. The effectiveness of the mobility management mechanisms within the hybrid is demonstrated by the success of the handover of the system 97.8 out of 100 times. Handovers are common, particularly in LEO satellite networks, which might impair performance in case they are not incurred in an efficient manner. The reason is that the success rate is high, which indicates that the routing and control used are effective in

having a smooth transition among the network segments. Multi-path communication is important as 35 percent of reliability was increased, which illustrates the relevance of path diversity in improving network resilience. The system will provide numerous paths through which data transmission may take place and this is a very important step in eliminating chances of communication failure. The recovery time of the failure less than 50 ms is indicative of the speed at which the system reacted to a break of the links. Such a quick recovery is necessary in applications that demand an extremely reliable communication. Lastly, the article has illustrated that most of the data sent is delivered to its destination and this is illustrated by the ratio of 98.6, confirming the stability and reliability of the proposed framework.

Table 4. Numerical Performance Data (Hybrid NTN)

Distance (km)	Latency (ms)	Throughput (Mbps)	Packet Loss (%)	Coverage (%)
50	18	115	0.8	99
100	22	112	1.0	99
200	26	108	1.2	98
400	30	105	1.5	98
600	34	100	1.7	97
800	38	95	1.9	97
1000	42	90	2.2	96

The numerical performance analysis of the system according to communication distance is given in Table 4 below. It was found that the distance has a near linear dependence on latency, largely because of propagation delay. Nevertheless, the growth is manageable as opposed to the satellite-only systems, which implies the success of hybrid routing. Throughput also reduces gradually with the distance, as a result of attenuation of the signal and the simultaneous utilisation of additional resources. The reduction is, however, not dramatic and at the distance of 1000 km by far, the throughput of the system is above 90 Mbps, which indicates a high degree of performance stability. The loss of packets increases moderately with distance as it is supposed to be because of interference and channel degradation. However, the values are quite low, this is, and the error control and routing strategies are successfully implemented. The coverage is over 96% at all distances, established again that the hybrid architecture has uniform coverage at long communication distances. This puts the strength and scalability of the proposed system into focus.

The graphical analysis gives more information on the behaviour of the proposed hybrid NTN framework under different distance and network load conditions, which significantly shows that the proposed hybrid NTN framework has better performance compared to the terrestrial and satellite systems alone. Three different trends are followed in Figure 4. The terrestrial-only network is characterised by a steep and nearly exponential distance dependence on latency, growing as short distances change to around 15 20 ms to an almost 190 ms minimum at a range of 800 km. This is largely attributed to more discharging routes, jam, and unavailability of long-distance routes support. The satellite-only system experiences a slower yet steadily high latency beginning at about 60 ms, and peaking at about 155 ms at 1000 km that is primarily due to propagation delay that is inherent during satellite communication. As a contrast, the hybrid NTN framework proposed here has much lower latency at all distances with only a slight increase of approximately 18 ms to 42 ms at distances of 50 km to 1000km respectively. The growth curve is my almost straight and by far flatter than the other systems. An important note is that there is a point at the latitude of about 400-600km, where the latency between the hybrid and standalone systems increases significantly. As an example, the 800km flow has approximately 38

ms in the hybrid system, versus 135 ms (satellite) and value of approximately 190 ms (terrestrial) which is over 70 percent in latency improvement. It is a clear indication that LEO-based routing and edge-assisted processing is useful to reduce long-distance communication delays. The hybrid system does not require needless routing hops and makes utilisation of ideal paths that is why the latency scaling in the hybrid scaling is kept under cheque even when the distance is high.

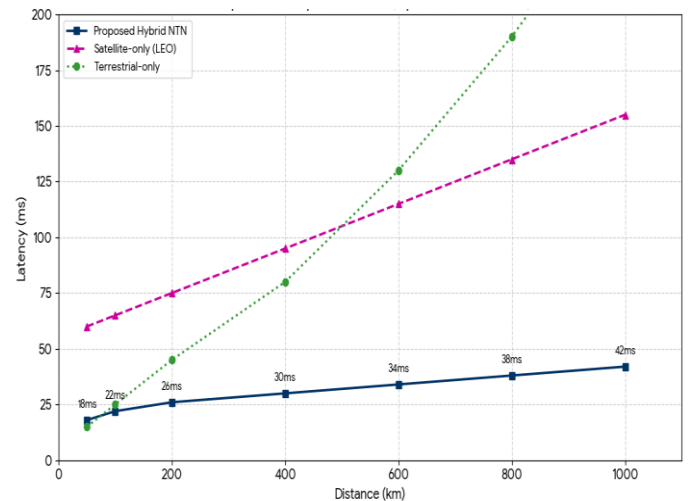


Fig. 5. End-to-End Latency vs Communication Distance for Hybrid, Terrestrial, and Satellite Networks

In Figure 5, it is also very instructive on the performance trend under increasing loads. The network with earth terminals only demonstrates a very high degradation through the throughput with the increase in load with a decline at 20 percent load to 35 Mbps at 100 percent load, which is very harmful resulting in severe congestion and limited scalability. The satellite-only system has fairly consistent yet low throughput of between 55 Mbps and 48 Mbps, owing to bandwidth factors and decreased reuse of frequencies. The proposed hybrid NTN framework is, however, the one that achieves maximum throughput at all load conditions. It is initiated at 115 Mbps when starting with the 20 percent load which is then slowly reducing to 90 Mbps when fully loaded exhibiting a moderate drop in performance. The hybrid system is even more than 150 percent faster than terrestrial networks and almost 90 percent faster than the satellite systems even in full load. Such stability implies that the system deals with congestion efficiently with the help of the

dynamic traffic offloading and multi-layer resource distribution. The capability to decentralise traffic at both the ground, air and satellite layers avoids the occurrence of bottlenecks and guarantees sustained information rates. The next notable fact is that throughput degradation does not occur abruptly as is the case with terrestrial networks; it occurs gradually with the hybrid system. It implies that the system is scalable in a highly efficient way with rise in the number of users and best fits in high traffic and dense environment. Load balancing, spectrum reuse, and smart routing will provide the combination of these three features to make sure the performance is not weak even under stressful conditions. On balance, the graphical outcomes allow concluding that the suggested hybrid NTN framework can not only enhance average performance but also ensure the stability of performance under the extreme conditions, such as long-distance communication or the full network load. This is an essential advantage compared with traditional systems which are prone to changes and deteriorate under such circumstances.

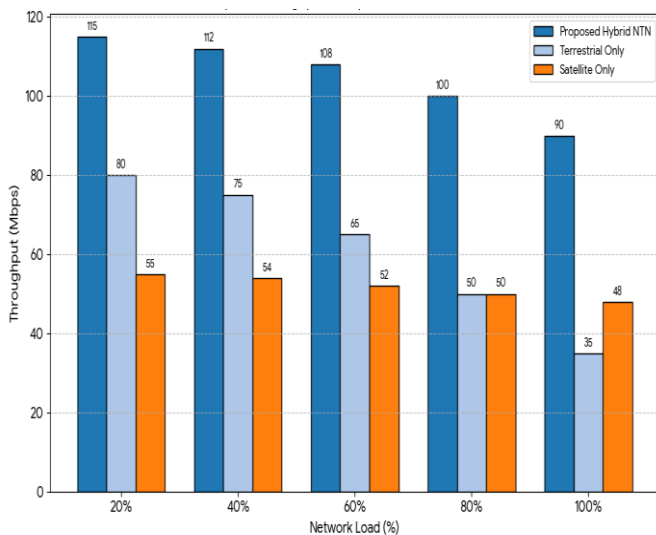


Fig. 6. Throughput Performance Comparison under Varying Network Load (Hybrid vs Terrestrial vs Satellite)

9. DISCUSSION

The findings duly support the efficiency of the suggested integrated satelliteNTN framework in overcoming the flaws of the conventional communication frameworks. These great advances in latency, throughput, coverage and the reliability are not accidental, it is a direct result of the multi-layer architecture and smart routing schemes implemented in the proposed model. Such a combination of terrestrial, aerial and satellite networks allows them to make dynamic selections of the path and therefore information is constantly transmitted over the best route possible. This is what makes the system especially good in adverse conditions like long distance communication and substantial network load in which

other systems would normally fail. The fact that the proposed framework has the potential to cover almost the globe is one of the biggest benefits of the suggested framework. As opposed to ground level networks, which are limited in their range due to the requirement to place infrastructure, the presence of LEO/MEO satellites and UAV/HAPS platforms translates to connectivity everywhere, even remote, rural, maritime and rough areas struck by a disaster. This directly tackles one of the fundamental issues that were indicated in the abstract which is coverage limitation.

High reliability is another great strength which is acquired by use of multi-path communication and redundant layers of a network. The system does not connect to one communication channel, rather it dynamically takes a different channel between terrestrial, aerial, and satellite connexions. It is observed that this redundancy greatly reduces the occurrence of link failure probability and provides a consistent service availability as indicated by high link availability and ratio of delivery of packets to link availability as is the case with the observed results.

The framework also allows a smooth connectivity especially when there is a high mobility. Effective handover processes between the layers of network constraints take care of continuous communication, which is essential in the likes of vehicular network, aeroplane and sea route communication. The routing through AI is also an addition of flexibility that can enable a network to react dynamically to evolving situations. Nevertheless, there is no free gain in these advantages. The latency or cost trade-off is one of the major problems. Although LEO satellites and edge computing play major roles in minimising latency, establishing and provisioning large constellations of satellites as well as UAV infrastructures are costly in terms of monetary input. This brings both practical scalability and economic viability issues particularly to the developing regions.

The other essential trade-off is that of complexity versus performance. The hybrid structure adds several layers, dynamic routing, and AI-like optimization of systems which add complexity to the system. Such system needs sophisticated control algorithm, synchronisation and resource allocation plans. Although this complexity allows achieving better performance, implementation, maintenance, and standardisation become more difficult. Nevertheless, the suggested framework has high potential especially in various areas of critical application. The NTN hybrid during a disaster recovery process, which in most cases destroys or disables terrestrial infrastructure, the hybrid system can quickly recover the communication system through satellite and UAV connexions. A smart city framework can be used to facilitate high-density connectivity and real-time data processing in smart cities, which can be used to support applications like

intelligent transportation and IoT networks. It supports quality telemedicine service in undercovered areas in remote healthcare as it ensures nonstop connection accessibility. Also, the system can be used to deliver stable communication to the wide area, where the traditional networks fail, in maritime industry and aviation industry. To the point, the hybrid NTN framework as suggested is not an incremental advancement- it is one of the structural changes in the feasibility of designing communication networks in the future. Its increase in the performance is real, and so are the challenges in its implementation. The deployment of any serious sort will require a trip to strike a balance between these two sides.

10. LIMITATIONS

Even though the adoption of the proposed integrated satellite-NTN framework has shown promising performance improvement, a number of limitations should be mentioned to give a realistic and balanced judgement. The limitation of extreme cost of deployment of the suggested architecture is one of the main constraints. LEO/MEO satellite constellations, UAV/HAPS platforms, and terrestrial infrastructure integration are costly to capitalise on. Specifically, the capitalization and sustenance of high-level satellite constellations and the implementation of aerial platforms are associated with high costs of operation and maintenance. Although the framework can be used in the long-term in terms of coverage and performance, the initial cost constraint can be a limitation to its adoption particularly in economically constrained areas. The other serious issue is the problem of regulation and spectrum allocation. Integrated networks of terrestrial, aerial and satellite networks necessitate coordinated sharing of spectrum in a multiplicity of frequencies. This brings about some complications of international regulations, licencing and interference management. Different nations have different policies regarding the use of the spectrum that may have a negative impact on the global implementation. Also, terrestrial and satellite systems can coexist in common frequency bands, which is of concern as it could lead to interference and effective use of the available spectrum.

The analysis in this work is majorly done through simulation validation through NS-3 and MATLAB. Although these tools offer a regulated and powerful backdrop of the performance analysis, they can not most likely represent all the real-life circumstances like random channel variations, hardware constraints and environmental variations. Consequently, the documented performance improvement might vary when the system is put to practical application. Field trials or test beds should be used to provide experimental validation to the usefulness of the proposed framework.

Moreover, the suggested system would add a great level of complexities connected to integration because of the multi-layer structure and dynamic routing systems. The process of synchronising terrestrial, aerial, and satellite levels implies the use of advanced control systems and protocols, metrics of synchronisation, and algorithms of dynamical decision-making. Such optimization requires a lot of computational logistics and effective data management, and furthermore, AI-based optimization makes the systems more complex. This complexity may be a challenge regarding system design, scalability and maintenance. Overall, although the presented hybrid NTN model proves to be superior in terms of performance benefits, its application is limited due to the presence of economic, regulatory, and technical limitations. The solution to these limitations will play a crucial role in replacing the models in literature with their operational counterparts in the new communication system in the future.

11. FUTURE WORK

The suggested hybrid NTN framework provides various possible paths to the future research and development, especially the communication systems of the future to become even more intelligent, secure, and more practically applicable in the real world. One of the future directions is the construction of AI autonomous NTN architectures. Though the existing model uses the principles of intelligent routing and optimization, the next generation work environment can also use techniques of machine learning and deep reinforcement learning to provide complete autonomy to the network. This involves forecasted traffic modeling, reconfigured resource schedules and self-optimizing routing choices according to the real-time network circumstances. This autonomy would greatly enhance efficiency of the network, minimise human intervention as well as be able to dynamically adapt to highly heterogeneous environments.

The other crucial extension is that of integrating 6G and terahertz (THz) communication technology. With the development of communication systems going beyond 5G, the use of THz frequency bands may allow to offer very high data rates, very low latency, and increased spectral efficiency. Incorporation of THz links into the hybrid NTN would also enhance high capacity backhaul and fronthaul connectivity especially in dense urban environment and high demand applications. Nevertheless, this demands the struggle with propagation loss, beam pointing and hardware limitations too. An additional area of future research that is vital is the initiation of quantum-safe communication systems. As quantum computing becomes more and more of a threat to classical cryptographic schemes, it will become necessary to add quantum-resistant algorithms and quantum key

distribution (QKD) methods to NTN architectures. This would guarantee the safe flow of data on the multi-layers networks, especially on the mission-implementing programmes like defence, health care and financial systems. Lastly, the proposed framework must be tested in real-world scenarios and experimental testbeds to confirm the practical viability of the proposed framework. The work of the future should be aimed at creating prototype applications with the use of software-defined radios (SDRs), satellite simulators, and UAV-based communications devices. Field tests under varying applications in remote areas, disaster areas, and urban intelligent cities will help to gain better information about the operation of the system under practical conditions. This is an important phase that would help close the distance between the simulation and scale application. In short, the further evolution will be aimed at enhancing the proposed NTN framework to be more intelligent, secure, and scalable to provide its successful implementation in the next-generation 6G and higher communication ecosystems.

CONCLUSION

To demonstrate this relationship, the suggested hybrid satellite-terrestrial-aerial network (NTN) framework is an efficient and scalable method of establishing the next-generation communication systems corresponding to wireless networks with the assistance of multiple network layers that are intelligently combined. The architecture also mitigates the shortcomings of individual terrestrial and satellite networks by allowing greater end-to-end coverage of the world especially in isolated and underserved areas, and at the same time achieve a low end-to-end latency as a result of optimisation of routing paths. The integration of adaptive and smart communications will also improve the overall reliability of the network so that there is predictable status during the active performance based on the load and other environmental factors. Such accomplishments emphasise the importance of the planned architecture as a high robustness and future-oriented communication platform, which makes it very relevant to beyond-5G and other developing 6G platforms that need universal network connectivity, highly reliable communication, and a smooth flow of services in various application areas.

REFERENCES

1. Araniti, G., Condoluci, M., Scopelliti, P., Molinaro, A., & Iera, A. (2017). Multicasting over emerging 5G networks: Challenges and perspectives. *Ieee network*, 31(2), 80-89.
2. Azari, M. M., Solanki, S., Chatzinotas, S., Kogheli, O., Sallouha, H., Colpaert, A. ... & Ottersten, B. (2022). Evolution of non-terrestrial networks from 5G to 6G: A survey. *IEEE communications surveys & tutorials*, 24(4), 2633-2672.
3. Dang, S., Amin, O., Shihada, B., & Alouini, M. S. (2020). What should 6G be?. *Nature Electronics*, 3(1), 20-29.
4. Evans, B., Werner, M., Lutz, E., Bousquet, M., Corazza, G. E., Maral, G., & Rumeau, R. (2005). Integration of satellite and terrestrial systems in future multimedia communications. *IEEE Wireless Communications*, 12(5), 72-80.
5. Fotouhi, A., Qiang, H., Ding, M., Hassan, M., Giordano, L. G., Garcia-Rodriguez, A., & Yuan, J. (2019). Survey on UAV cellular communications: Practical aspects, standardization advancements, regulation, and security challenges. *IEEE Communications surveys & tutorials*, 21(4), 3417-3442.
6. Guidotti, A., Vanelli-Coralli, A., Conti, M., Andrenacci, S., Chatzinotas, S., Maturo, N., & Cioni, S. (2019). Architectures and key technical challenges for 5G systems incorporating satellites. *IEEE Transactions on Vehicular Technology*, 68(3), 2624-2639.
7. Kogheli, O., Guidotti, A., & Vanelli-Coralli, A. (2017, December). Integration of Satellites in 5G through LEO Constellations. In *GLOBECOM 2017-2017 IEEE Global Communications Conference* (pp. 1-6). IEEE.
8. Kogheli, O., Guidotti, A., & Vanelli-Coralli, A. (2017, December). Integration of Satellites in 5G through LEO Constellations. In *GLOBECOM 2017-2017 IEEE Global Communications Conference* (pp. 1-6). IEEE.
9. Latva-Aho, M., & Leppänen, K. (2019). Key drivers and research challenges for 6G ubiquitous wireless intelligence.
10. Letaief, K. B., Chen, W., Shi, Y., Zhang, J., & Zhang, Y. J. A. (2019). The roadmap to 6G: AI empowered wireless networks. *IEEE communications magazine*, 57(8), 84-90.
11. Li, B., Fei, Z., Zhang, Y., & Guizani, M. (2019). Secure UAV communication networks over 5G. *IEEE Wireless Communications*, 26(5), 114-120.
12. Mao, Q., Hu, F., & Hao, Q. (2018). Deep learning for intelligent wireless networks: A comprehensive survey. *IEEE Communications Surveys & Tutorials*, 20(4), 2595-2621.
13. Mozaffari, M., Saad, W., Bennis, M., Nam, Y. H., & Debbah, M. (2019). A tutorial on UAVs for wireless networks: Applications, challenges, and open problems. *IEEE communications surveys & tutorials*, 21(3), 2334-2360.
14. Saad, W., Bennis, M., & Chen, M. (2019). A vision of 6G wireless systems: Applications, trends, technologies, and open research problems. *IEEE network*, 34(3), 134-142.
15. Wong, O. S., Gregory, M. A., & Li, S. (2025). Integration of non-terrestrial network for 5G NR and future 6G: LEO satellite-to-device performance and interference analysis. *Computer Networks*, 111870.
16. Zhang, Z., Xiao, Y., Ma, Z., Xiao, M., Ding, Z., Lei, X., & Fan, P. (2019). 6G wireless networks: Vision, requirements, architecture, and key technologies. *IEEE vehicular technology magazine*, 14(3), 28-41.